


Two-piece design incorporating patented Gripple technology with a multi-purpose injection moulded load bearing plate, ideal against invasive plants.

FEATURES / BENEFITS

- Ideal for fixing geomat for the fight against invasive plants
- Low profile design
- Pre-assembled kit ensures time and labour savings
- Available with 1 m wire length as a standard and can be delivered with 1,5m on request



INSTALLATION

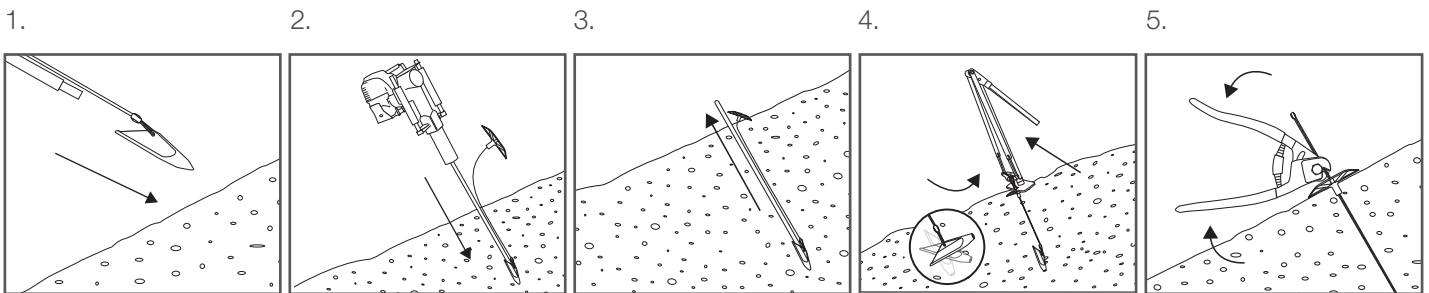

For more information on how to install the Terra-Lock™ system visit our YouTube channel - GrippleTV. Alternatively see Installation Guidelines & Procedures.

SPECIFICATION

Component	Type	Material	Specifications
Top Bearing Plate & Top Termination	TL-304	Glass Nylon Filled Zinc-Aluminium Alloy - ZA 2 & Ceramic	Head Size: 100 mm Diameter Working temperature: -40 °C to +60 °C UV stabilised PP end cap
Anchor Head	TL-A2	Zinc-Aluminium Alloy - ZA 2	Surface Area: 1,940 mm ²
	TL-A3		Surface Area: 3,870 mm ²
Wire Rope Tendon	3MM-Z	Zinc-Aluminium Zn-AL Coated Carbon Steel	Diameter: 3 mm, 1x19 Strand (1,770 N/mm ² tensile strength to DIN 3053)
Lower Termination	Ferrule	Aluminium	Length: 12,8 mm Wall thickness: 1,5 mm

“The longevity depends on location factors and soil, water & climate conditions as well as the local risk of erosion on site. PP materials are UV protected, designed for a long life.” For load capacity please refer to the SPT technical sheet information.

INSTALLATION TOOLS



For more information contact us or visit our website - www.gripple.com

